


TECHNICAL INFORMATION

Arrow :	15 mm
Category :	With bellows
Contact lip diameter :	40 mm
Height (in mm) :	29
Horizontal force :	49 N
inner barrel diameter :	6.5mm
Number of bellows :	2.5 Bellows
Range :	Suction cup
Series :	96C
Shape :	2.5 Bellows
Vertical force :	24.5 N



Variants:

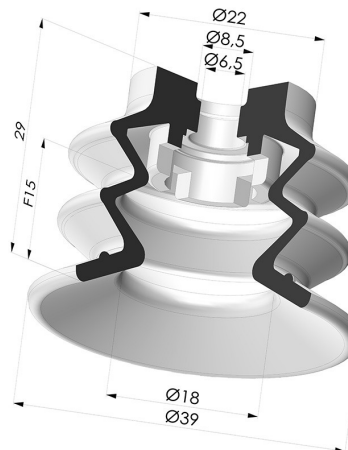

Variant reference:

96C 40PU A

- Color: Green / Yellow
- Matter: Polyurethane
- Shore Hardness: SH60 / SH30

Related products:



Separable Male Fitting 1/4G

Product reference:
9M14-2



Separable Male Fitting 1/4G - with Spray Nozzle

Product reference:
9M14-2-GIC



Separable Female Fitting 1/8G

Product reference:
9M18-2



Separable Female Fitting 1/8G - with Filter

Product reference:
9M18-2-F



Separable Female Fitting 1/8G - with Spray Nozzle

Product reference:
9M18-2-GIC



Separable Female Fitting 1/8G - with 5 Outputs

Product reference:
9M18-3



Separable Male Fitting 3/8G

Product reference:
9M38-2



Separable Male Fitting 3/8G - with Filter

Product reference:
9M38-2-F



Separable Male Fitting 3/8G - with Spray Nozzle

Product reference:
9M38-2-GIC



Flexible White Filter Series FIBS Ø 29 mm

Product reference: FIBS
96 40



Separable Male Fitting 1/4G - with Filter

Product reference:
9MM14-4-F



Separable Female Fitting 1/4G - with Filter

Product reference:
9MF14-4-F