


### TECHNICAL INFORMATION

|                         |              |
|-------------------------|--------------|
| Arrow :                 | 9 mm         |
| Category :              | With bellows |
| Contact lip diameter :  | 20 mm        |
| Height (in mm) :        | 22           |
| Horizontal force :      | 15.5 N       |
| inner barrel diameter : | 6 mm         |
| Number of bellows :     | 1.5 Bellows  |
| Range :                 | Suction cup  |
| Series :                | PBG          |
| Shape :                 | 1.5 Bellows  |
| Top diameter :          | 6 mm         |
| Vertical force :        | 7.5 N        |



### Variants:

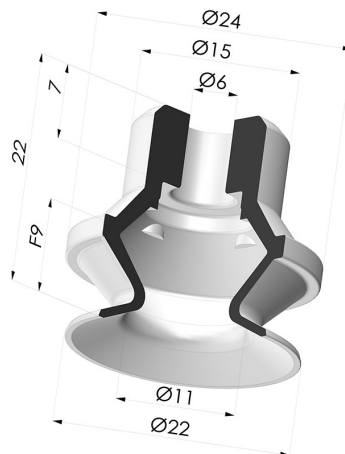

Variant reference:

**PBG 20BNI A**

- Color: Black
- Matter: Nitrile
- Shore Hardness: SH50



Variant reference:

**PBG 20BSLT A**

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:

**PBG 20BUR A**

- Color: Blue
- Matter: Urethane
- Shore Hardness: SH60

### Related products:



#### Adaptor - Female 1/4G - Female M6

Product reference: ADA  
G1/4F M6F



#### Adaptor - Male 1/4G - Female M6

Product reference: ADA  
G1/4M M6F



#### Adaptor - Female 1/8G - Female M6

Product reference: ADA  
G1/8F M6F



#### Adaptor - Male 1/8G - Female M6

Product reference: ADA  
G1/8M M6F




#### Separable Female Fitting 1/4G

Product reference: FTF  
20B G1/4



#### Separable Female Fitting 1/8G

Product reference: FTF  
20B G1/8



#### Separable Male Fitting 1/4G

Product reference: FTM  
20B G1/4



#### Separable Male Fitting 1/8G

Product reference: FTM  
20B G1/8



#### Screw M6 - Head Ø 11 mm - L 17 mm

Product reference: SCR  
20B M6M